



CREATING A CLEANER, SAFER, HEALTHIER WORLD.

EQUIPMENT



6200

COMPACT RIDER SWEEPER

- Exceptional performance with efficient, one-pass sweeping and dust containment
- Superb maneuverability from compact size and easy operation
- Dramatically reduced cleaning costs with highly reliable Tennant parts and engineering

EXPERTLY-DESIGNED 6200 SWEEPER OFFERS EFFORTLESS OPERATION AND INCREASED PRODUCTIVITY



Engineered and built with Tennant's high quality parts, the 6200 delivers virtually continuous operation. Increase productivity with efficient one-pass cleaning, and multi-level dump hopper.

EXCELLENT SWEEPING AND DUST CONTROL

AutoAdjust™ design matches brush height to brush wear for sweeping of light dust and debris in one pass. The 6200's 2-stage dust control helps remove air-borne dust.

WORRY-FREE DURABILITY

Solid steel frame, hydraulic oil system and no-tool brush changes keep the reliable 6200 up and running.

EASY OPERATION FOR INCREASED PRODUCTIVITY

Excellent sightlines, easy-to-use controls, and the multi-level dump hopper makes for easy operation. The hopper can be emptied directly into containers up to 4.5 ft / 1.37 m.

INSIDE THE

6200



HIGH DUMP HOPPER FOR EASE OF USE AND OPERATOR SAFETY

The standard multi-level high dump hopper eliminates manual lifting, helping keep operator safe.

The large capacity hopper means more sweeping between dumpings.

MUST-HAVE OPTIONS

Extend cleaning reach


Access hard-to-reach areas with the optional instantly activated vacuum wand.

Enhance capability

QuickMop® effectively dry mops smooth concrete or finished surfaces with the mop's wide, 5.5 ft / 1.67 m, path.

Increase productivity

Dual side brushes expand the machine's sweeping reach to clean more floor space in less time.

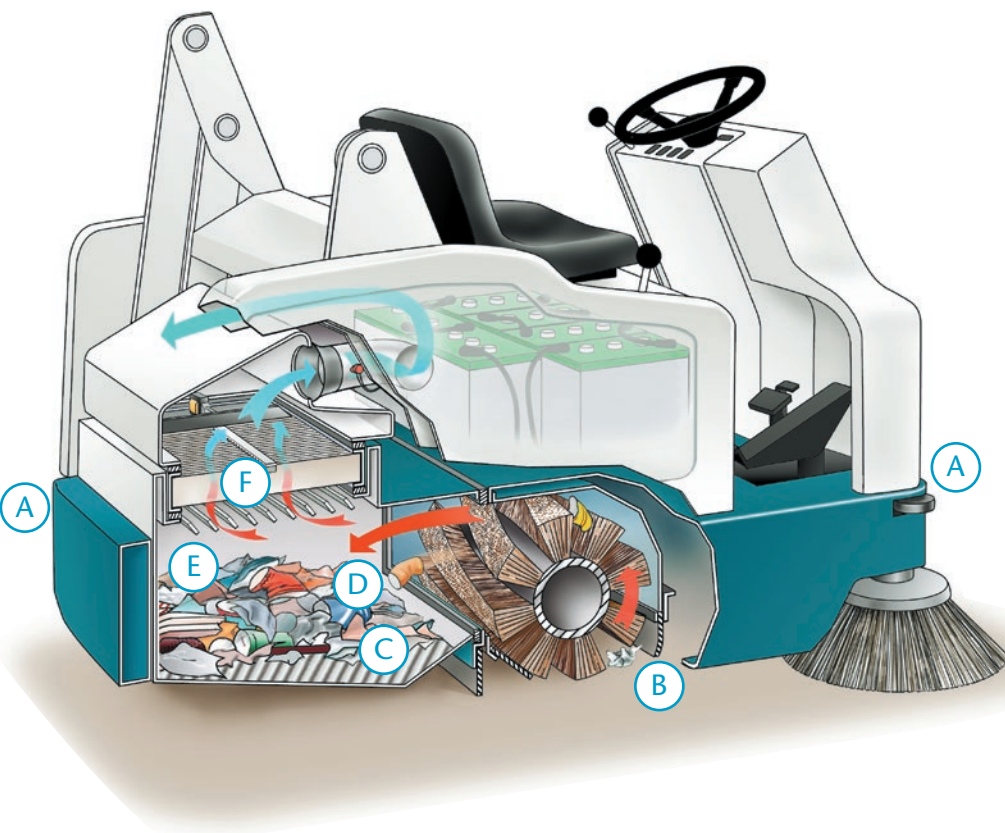

A Protect fixtures and equipment, as well as the sweeper, with the rear bumper and corner rollers.

B Maintain maximum cleaning power with the patented AutoAdjust™ brush cavity that automatically adjusts as bristles shorten.

C Thermo-Sentry™ monitors the hopper temperature and, in dangerously high temperatures, initiates vacuum shut-down.

D Effectively load different types of debris with adjustable four-sided, front-loading hopper and a sweeping system that can adjust to the type of debris.

E Conveniently empty hopper directly into containers up to 4.5 ft / 1.37 m.

F VCS® filter-shaking system effectively contains dust and keeps filter pleats free of clogs.

- Reduce rework, labor and safety costs by using only Tennant True parts and service.
- Ensure optimal cleaning performance by selecting a Tennant True Service program provided by a network of over 400 factory-trained Tennant service representatives.
- Improve uptime by leveraging Tennant True parts and service.
- Simplify budgeting by bundling Tennant True service plans, including parts, into the purchase or financing of your machine.
- Manage your cleaning program with real-time machine data from Tennant's IRIS™ technology.

Choose GE Capital or U.S. Bancorp, our leasing providers, for simple, quick financing with flexible upgrade options.

6200 COMPACT RIDER SWEEPER

SWEEPING SYSTEM

| | |
|-----------------------------|-----------------------------|
| Cleaning path | |
| One side brush | 42 in / 1,070 mm |
| Two side brushes | 55 in / 1,400 mm |
| Main brush | |
| Main brush length (tubular) | 28 in / 710 mm |
| Main brush drive | Belt |
| Main brush change | No-tool |
| Side brush diameter | 20.5 in / 520 mm |
| Debris hopper | |
| Volume capacity | 4.4 ft ³ / 125 L |
| Weight capacity | 300 lb / 136 kg |
| Dump height (variable to) | 4.5 ft / 1.37 m |

DUST CONTROL SYSTEM

| | |
|--|---|
| Filter system (dual stage, to 3 microns) | |
| Stage 1 | Perma-filter™ |
| Stage 2 | 49 ft ² panel filter / 4.6 m ² panel filter |
| Dust filtration (to) | 3 microns |
| Vacuum fan speed | 4,300 rpm |

PROPELLING SYSTEM

| | |
|--------------------------------------|-------------------|
| Battery package | 235 Ah |
| Propelling motor | 0.75 hp / 0.56 kW |
| Battery Model: Forward (variable to) | 5.5 mph / 9 km/h |
| Reverse (variable to) | 3 mph / 4.8 km/h |
| Gradeability | |
| Full hopper | 6.0 deg/11% |
| Empty hopper | 10.0 deg/18% |

MACHINE SPECIFICATIONS

| | |
|-----------------------|--------------------|
| Length | 77 in / 1,960 mm |
| Width | |
| With one side brush | 48.5 in / 1,230 mm |
| With two side brushes | 56 in / 1,420 mm |
| Without side brush | 42 in / 1,050 mm |
| Height | 56.5 in / 1,440 mm |
| Weight | |
| With battery | 2,034 lb / 923 kg |
| Without battery | 1,644 lb / 746 kg |

WARRANTY

See your local representative for warranty information.

Specifications subject to change without notice.

SEEING IS BELIEVING

For a demonstration or additional information,
call +1.800.553.8033 or email info@tennantco.com

Tennant
701 North Lilac Drive
Minneapolis, MN 55422 USA

USA/Canada: +1.800.553.8033
Quebec: +1.800.361.9050
Overseas: +1.763.540.1315